


PULL HANDLES

A range offering four diameters and four lengths as standard with the option of specifying any length required. For alternative designs, please refer to pages 14 and 15.



eight

Dimensions all
centre/centre

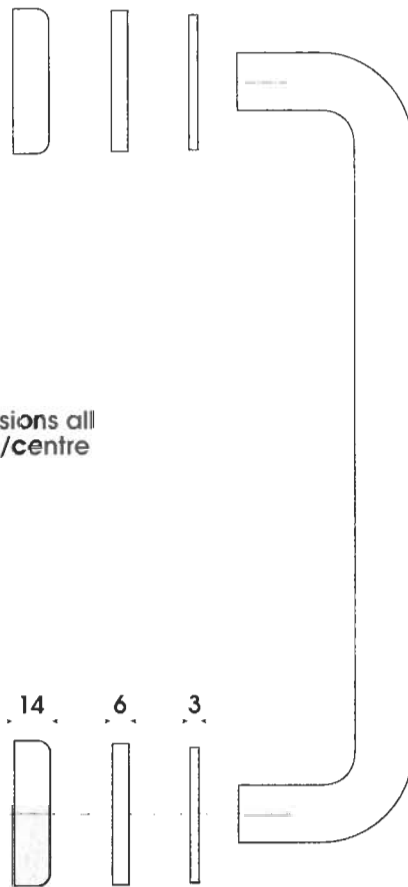


Back to back handles are supplied with beefeater bolts for a secure fixing. Standard bolts are designed for 45mm - 55mm width doors. For thicker doors of 75mm and over, please advise thickness when ordering. Please also state when ordering for glass doors. As an alternative to back to back handles, roses or plates can be bolted through for extra security using 'T' fix bolts. Please refer to our price list for standard sizes for pull handles on plates. Specials can be produced to any size and gauge.

DIA.	C/S	FITTING	ALUMINIUM	STAINLESS	P.BRASS
19	150	B/Through	AS 19RBT2	SS 19RBT2	PB 19RBT2
19	225	B/Through	AS 19RBT3	SS 19RBT3	PB 19RBT3
19	300	B/Through	AS 19RBT4	SS 19RBT4	PB 19RBT4
19	150	Face Fix	AS 19RFF2	SS 19RFF2	PB 19RFF2
19	225	Face Fix	AS 19RFF3	SS 19RFF3	PB 19RFF3
19	300	Face Fix	AS 19RFF4	SS 19RFF4	PB 19RFF4
19	150	Con.Rose	AS 19RCR2	SS 19RCR2	PB 19RCR2
19	225	Con. Rose	AS 19RCR3	SS 19RCR3	PB 19RCR3
19	300	Con. Rose	AS 19RCR4	SS 19RCR4	PB 19RCR4
19	150	Back/Back	N/A	SS 19RBB2	PB 19RBB2
19	225	Back/Back	N/A	SS 19RBB3	PB 19RBB3
19	300	Back/Back	N/A	SS 19RBB4	PB 19RBB4
19	150	on 10g Plate	AS 19RPP2	SS 19RPP2	PB 19RPP2
19	225	on 10g Plate	AS 19RPP3	SS 19RPP3	PB 19RPP3
19	300	on 10g Plate	AS 19RPP4	SS 19RPP4	PB 19RPP4
19	150	eng. Push/Pull	AS 19REP2	SS 19REP2	PB 19REP2
19	225	eng. Push/Pull	AS 19REP3	SS 19REP3	PB 19REP3
19	300	eng. Push/Pull	AS 19REP4	SS 19REP4	PB 19REP4
22	150	B/Through	AS 22RBT2	SS 22RBT2	PB 22RBT2
22	225	B/Through	AS 22RBT3	SS 22RBT3	PB 22RBT3
22	300	B/Through	AS 22RBT4	SS 22RBT4	PB 22RBT4
22	150	Face Fix	AS 22RFF2	SS 22RFF2	PB 22RFF2
22	225	Face Fix	AS 22RFF3	SS 22RFF3	PB 22RFF3
22	300	Face Fix	AS 22RFF4	SS 22RFF4	PB 22RFF4
22	150	Con. Rose	AS 22RCR2	SS 22RCR2	PB 22RCR2
22	225	Con. Rose	AS 22RCR3	SS 22RCR3	PB 22RCR3
22	300	Con. Rose	AS 22RCR4	SS 22RCR4	PB 22RCR4
22	150	Back/Back	AS 22RBB2	SS 22RBB2	PB 22RBB2
22	225	Back/Back	AS 22RBB3	SS 22RBB3	PB 22RBB3
22	300	Back/Back	AS 22RBB4	SS 22RBB4	PB 22RBB4
22	150	on 10g Plate	AS 22RPP2	SS 22RPP2	PB 22RPP2
22	225	on 10g Plate	AS 22RPP3	SS 22RPP3	PB 22RPP3
22	300	on 10g Plate	AS 22RPP4	SS 22RPP4	PB 22RPP4
22	150	eng. Push/Pull	AS 22REP2	SS 22REP2	PB 22REP2
22	225	eng. Push/Pull	AS 22REP3	SS 22REP3	PB 22REP3
22	300	eng. Push/Pull	AS 22REP4	SS 22REP4	PB 22REP4
25	225	B/Through	AS 25RBT3	SS 25RBT3	PB 25RBT3
25	300	B/Through	AS 25RBT4	SS 25RBT4	PB 25RBT4
25	425	B/Through	AS 25RBT5	SS 25RBT5	PB 25RBT5
25	225	Face Fix	AS 25RFF3	SS 25RFF3	PB 25RFF3
25	300	Face Fix	AS 25RFF4	SS 25RFF4	PB 25RFF4
25	425	Face Fix	AS 25RFF5	SS 25RFF5	PB 25RFF5
25	225	con. Rose	AS 25RCR3	SS 25RCR3	PB 25RCR3
25	300	con. Rose	AS 25RCR4	SS 25RCR4	PB 25RCR4
25	425	con. Rose	AS 25RCR5	SS 25RCR5	PB 25RCR5
25	225	Back/Back	AS 25RBB3	SS 25RBB3	PB 25RBB3
25	300	Back/Back	AS 25RBB4	SS 25RBB4	PB 25RBB4
25	425	Back/Back	AS 25RBB5	SS 25RBB5	PB 25RBB5
25	225	on Plate	AS 25RPP3	SS 25RPP3	PB 25RPP3
25	300	on Plate	AS 25RPP4	SS 25RPP4	PB 25RPP4
25	425	on Plate	AS 25RPP5	SS 25RPP5	PB 25RPP5
25	225	eng. Push/Pull	AS 25REP3	SS 25REP3	PB 25REP3
25	300	eng. Push/Pull	AS 25REP4	SS 25REP4	PB 25REP4
25	425	eng. Push/Pull	AS 25REP5	SS 25REP5	PB 25REP5
33	225	B/Through	AS 33RBT3	N/A	N/A
33	300	B/Through	AS 33RBT4	N/A	N/A
33	425	B/Through	AS 33RBT5	N/A	N/A
33	225	con. Rose	AS 33RCR3	N/A	N/A
33	300	con. Rose	AS 33RCR4	N/A	N/A
33	425	con. Rose	AS 33RCR5	N/A	N/A
33	225	Back/Back	AS 33RBB3	N/A	N/A
33	300	Back/Back	AS 33RBB4	N/A	N/A
33	425	Back/Back	AS 33RBB5	N/A	N/A
33	225	on Plate	AS 33RPP3	N/A	N/A
33	300	on Plate	AS 33RPP4	N/A	N/A
33	425	on Plate	AS 33RPP5	N/A	N/A
33	225	eng. Push/Pull	AS 33REP3	N/A	N/A
33	300	eng. Push/Pull	AS 33REP4	N/A	N/A
33	425	eng. Push/Pull	AS 33REP5	N/A	N/A

BOLT THROUGH



FACE FIX

CONCEALED

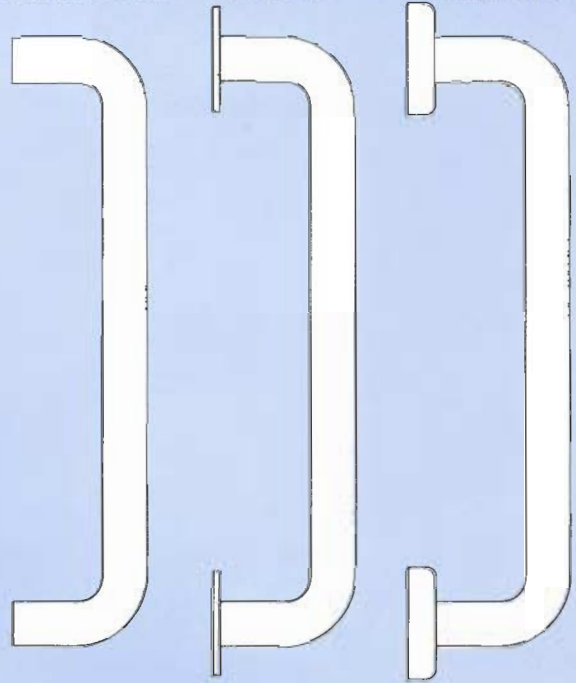

BACK TO BACK

ON PLATE

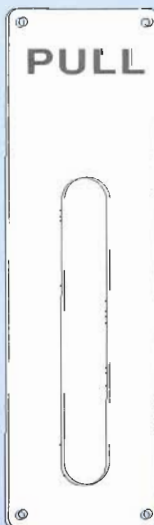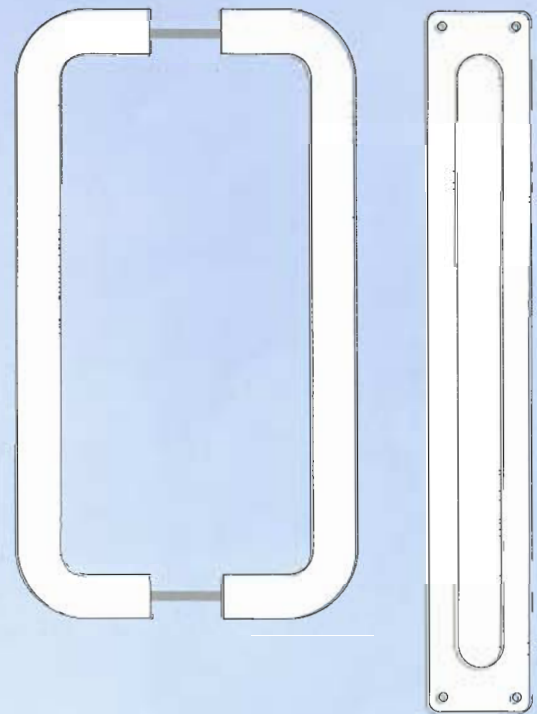

PULL

ON ENGRAVED PLATE

ON SQUARE PLATE

