




Witley suite - lever handles

A wide range of return to door and straight lever handles manufactured from aluminium brass and stainless steel. Manufactured to superior quality standards from the finest materials available HE9 aluminium extrusion and 5005 aluminium sheet for anodised aluminium products; in AISI316 for stainless steel (where external use is required) or 304 stainless steel for internal applications.


The Witley Suite can be altered to your specification. For example, centres to accommodate oval or profile cylinders can be varied for the selected lock and levers are fully interchangeable. All our products can be bolted through the door

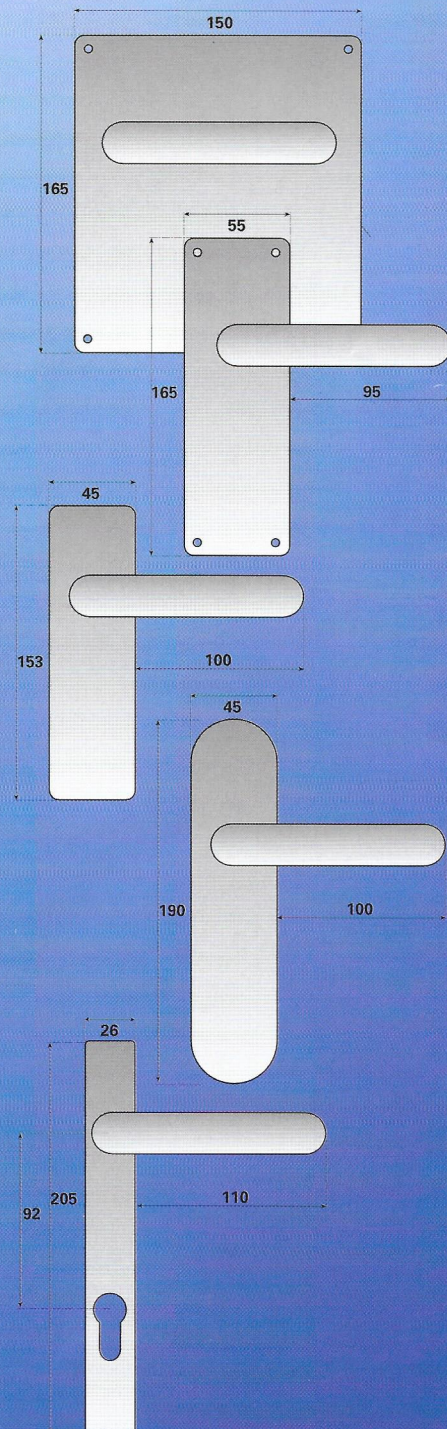


Lock centres – when ordering oval or profile, please state centres required. Standard centres are 48.5mm, but any centres can be accommodated.

Face fixing plates are 10g in aluminium and 16g in stainless steel and brass.


Concealed




16RCH
20RCH
22RCH
16RSTCH
20RSTCH
22RSTCH




16RCK
20RCK
22RCK
16RSTCK
20RSTCK
22RSTCK




16RCL
20RCL
22RCL
16RSTCL
20RSTCL
22RSTCL





16RCE
20RCE
22RCE
16RSTCE
20RSTCE
22RSTCE




16RCM
20RCM
22RCM
16RSTCM
20RSTCM
22RSTCM




16RCMD
20RCMD
22RCMD
16RSTCMD
20RSTCMD
22RSTCMD




16ROVH
20ROVH
22ROVH
16RSTOVH
20RSTOVH
22RSTOVH




16ROVK
20ROVK
22ROVK
16RSTOVK
20RSTOVK
22RSTOVK




16ROVL
20ROVL
22ROVL
16RSTOVL
20RSTOVL
22RSTOVL




16ROVE
20ROVE
22ROVE
16RSTOVE
20RSTOVE
22RSTOVE




16ROVM
20ROVM
22ROVM
16RSTOVM
20RSTOVM
22RSTOVM




16ROVMD
20ROVMD
22ROVMD
16RSTOVMMD
20RSTOVMMD
22RSTOVMMD




Face fix




16RNH
20RNH
22RNH
16RSTNH
20RSTNH
22RSTNH




16RNK
20RNK
22RNK
16RSTNK
20RSTNK
22RSTNK




16RNL
20RNL
22RNL
16RSTNL
20RSTNL
22RSTNL





16RNE
20RNE
22RNE
16RSTNE
20RSTNE
22RSTNE




16RNM
20RNM
22RNM
16RSTNM
20RSTNM
22RSTNM




16RNMMD
20RNMMD
22RNMMD
16RSTNMMD
20RSTNMMD
22RSTNMMD




16RWH
20RWH
22RWH
16RSTWH
20RSTWH
22RSTWH




16RWK
20RWK
22RWK
16RSTWK
20RSTWK
22RSTWK




16RWL
20RWL
22RWL
16RSTWL
20RSTWL
22RSTWL




16RWE
20RWE
22RWE
16RSTWE
20RSTWE
22RSTWE




16RWM
20RWM
22RWM




16RSTWM
20RSTWM
22RSTWM



16RWMD
20RWMD
22RWMD



16RSTWMD
20RSTWMD
22RSTWMD

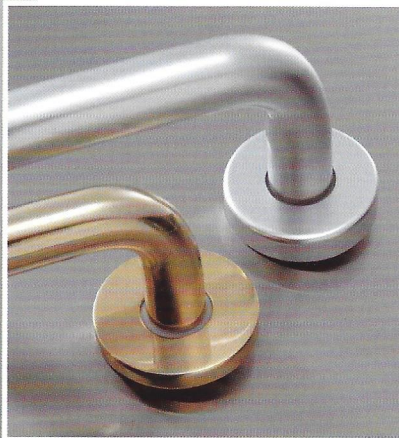

6mm deep
Escutcheons



ECK35



ECL35



ECE35

10mm deep
Escutcheons



10ECK1




10ECL2




10ECE3

Bathroom indicators




DIFM12S




101FM1/2

Oval door
stop



DS6

Concealed skirting
door stop



DS2

Secret fix
door stop




DS3

Floor round
door stop




DS5


Cylinder pulls




CPH1




CPK2




CPL3




CPE4



CPR6




Concealed slimline



Concealed

All rose fittings (including escutcheons) can be supplied with bolt through at standard 38mm centres using 'T' fix bolts. For variations please contact a member of our technical staff.


Levers on roses



16RCR
20RCR
22RCR
16RCRS
20RCRS
22RCRS

16RSTCR
20RSTCR
22RSTCR
16RSTCRS
20RSTCRS
22RSTCRS

Heavy duty
handrail bracket



HRB2

Letter plates

aluminium inward opening

300mm x 100mm ASLP135
350mm x 125mm ASLP156
400mm x 125mm ASLP176

stainless steel inward opening

330mm x 100mm SSLP135


Other sizes to special order

Witley suite - levers on roses, escutcheons, turns & releases

A range of levers and knobs on either 10mm sprung roses or slimline unsprung roses. Escutcheons to suit most applications, slimline, standard or 10g face fix. All levers are spindle fixed using grub screws.

All the items listed are available in the following finishes; AS, PB, SSS, PSS
Refer to page 3 for glossary of finishes.

Dimensions all
centre/centre



Back to back handles are supplied with beefeater bolts for a secure fixing. Standard bolts are designed for 45mm - 55mm width doors. For thicker doors of 60mm and over, please advise thickness when ordering. Please also state when ordering for glass doors.

As an alternative to back to back handles, roses or plates can be bolted through for extra security using 'T' fix bolts.

Please refer to our price list for standard sizes for pull handles on plates. Specials can be produced to any size and gauge.

Bolt through

16RBT150
16RBT225
16RBT300
20RBT150
20RBT225
20RBT300
22RBT150
22RBT225
22RBT300
26RBT150
26RBT225
26RBT300

On concealed rose

16RCR150
16RCR225
16RCR300
20RCR150
20RCR225
20RCR300
22RCR150
22RCR225
22RCR300
26RCR150
26RCR225
26RCR300

Cranked bolt through

20RBTCR150
20RBTCR225
20RBTCR300
20RBTCR425
20RBTCR600
22RBTCR150
22RBTCR225
22RBTCR300
22RBTCR425
22RBTCR600
25RBTCR150
25RBTCR225
25RBTCR300
25RBTCR425
25RBTCR600

Back to back

16RBB150
16RBB225
16RBB300
20RBB150
20RBB225
20RBB300
22RBB150
22RBB225
22RBB300
26RBB150
26RBB225
26RBB300

Cranked back to back

20RBBCR225
20RBBCR300
20RBBCR425
20RBBCR600
22RBBCR225
22RBBCR300
22RBBCR425
22RBBCR600
25RBBCR225
25RBBCR300
25RBBCR425
25RBBCR600

On plate

16RPP150
16RPP225
16RPP300
20RPP150
20RPP225
20RPP300
22RPP150
22RPP225
22RPP300
26RPP150
26RPP225
26RPP300

On engraved plate

16REP150 22REP150
16REP225 22REP225
16REP300 22REP300
20REP150 26REP150
20REP225 26REP225
20REP300 26REP300

On square plate

170 x 170mm

Witley suite - pull handles

A range offering four diameters and four lengths as standard with the option of specifying any length required.

All the items listed are available in the following finishes; AS, PB, SSS, PSS

Refer to page 3 for glossary of finishes.

Please contact our sales office for alternative finishes.



Witley suite - fittings for the less able


Although our range can be accurately described as user friendly, we have developed a suite of products specifically to assist the disabled, including extended bathroom turns which are easy to grip. Our specially extended lever handle is easy to operate with elbows, but safely returns to the door, to avoid catching clothing, particularly sleeves and pockets.

As with most of our range, we can produce special items to complement our standard fittings to help the less able, and our technical staff are always available to offer advice or review sketches / drawings of products to meet special needs.

All the items listed are available in the following finishes; AS, PB, SSS, PSS


Refer to page 3 for glossary of finishes.

Triple bend lever

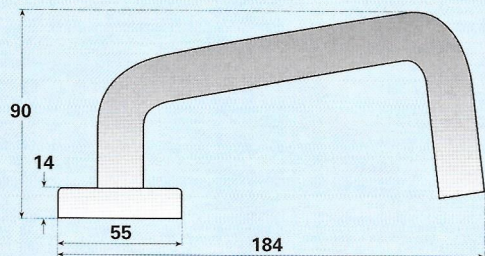


ASD19RCR
ASD1FM12
ASD19RCH
ASD19RCK
ASD19RCL
ASD19RCE
ASD19RCM


Triple bend lever on rose
Bathroom indicators with easy to use turn
Triple bend lever on long latch plate
Triple bend lever on lock plate
Triple bend lever on oval concealed plate
Triple bend lever on profile concealed plate
Triple bend lever on bathroom plate with easy to use turn available in white epoxy coated or polished aluminium

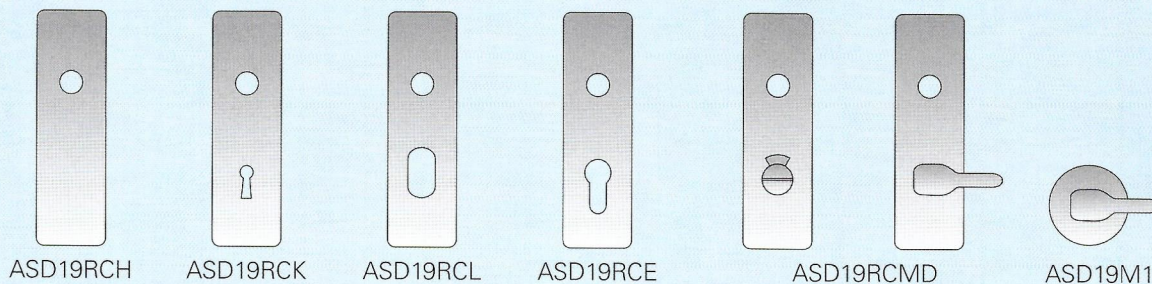

Easy to use extended pull handle

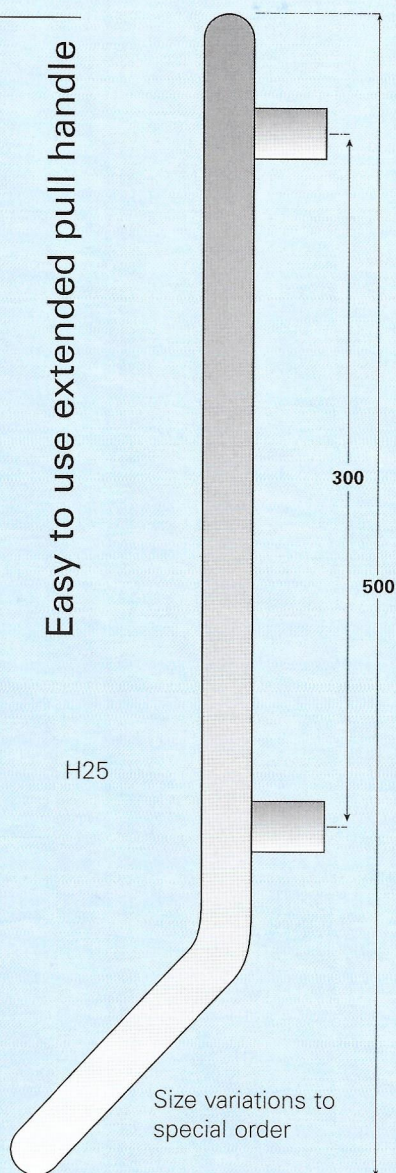


HTM lever handle

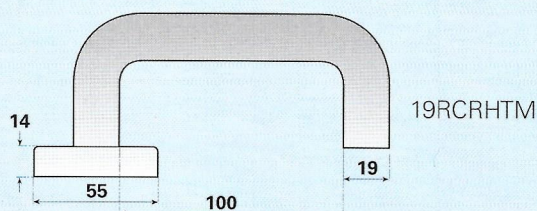

19RHTMCR 19mm lever on rose
19RHTMCH Lever on latch plate concealed
19RHTMCK Lever on lock plate concealed
19RHTMCL Lever on oval lock plate concealed
19RHTMCE Lever on profile lock plate concealed
19RHTMCM Lever on bathroom plate
19RHTMCMMD Lever on bathroom plate with easy to use turn
22RHTMCR 22mm lever on rose
22RHTMCH Lever on latch plate concealed
22RHTMCK Lever on lock plate concealed
22RHTMCL Lever on oval lock plate concealed
22RHTMCE Lever on profile lock plate concealed
22RHTMCM Lever on bathroom plate
22RHTMCMMD Lever on bathroom plate with easy to use turn


Anti ligature knob

Designed to discourage the attachment of ligatures to the body of the knob. Can be bolted through the door or fitted to the face with recommended concealed fittings



ANT1

Anti ligature pull handle

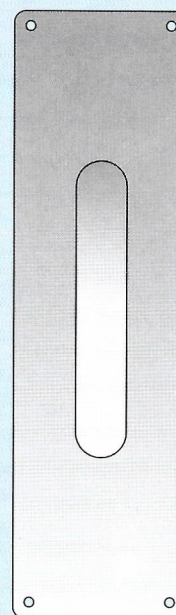

ANT2



Materials; Aluminium, Brass, Stainless Steel

Standard finishes available - polished aluminium, polished and EPC coated brass, satin stainless steel and mirror polished stainless steel.

Non Standard Finishes: Gold and bronze anodised satin brass, colour coated to RAL B.S. No's, IBMA, satin Aluminium. Stainless steel contrast finish polished and satin.

Fittings:

For wooden, glass or metal doors. Bolt through back to back, cranked or straight feet. Concealed rose fixing.

Diameters Available:

25mm, 32mm, 38mm & 50mm

For standard lengths please see our price list. We are pleased to advise the most suitable application. Longer pull handles, 2100mm can be supplied with three or four feet for added strength and stability.

Witley suite - entrance doors

A prestigious range of door handles available in a comprehensive range of sizes tailored to suit individual requirements.

On the page opposite is illustrated the standard range of Witley entrance handles, together with a stock range of standard cranked pull handles.

Each of these are available in a range of finishes: polished anodised aluminium, satin or polished 316 stainless steel, polyester powder coated to standard RAL colours. Fixing centres can be offset if required.

Should you require a special design for an individual application, please contact our technical department.


All the items listed are available in the following finishes; AS, PB, SSS, PSS

Refer to page 3 for glossary of finishes.

For care of our fine finishes please refer to page 27

Pillar Handles

Diameter Range

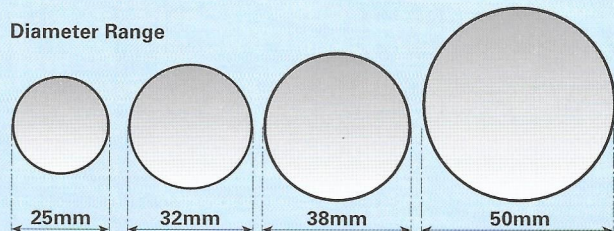


Cranked Pull Handles

DIA. C/S FITTING


32	225	B/Through	32RBTPR225
32	300	B/Through	32RBTPR300
32	425	B/Through	32RBTPR425
32	225	Back/Back	32RBBPR225
32	300	Back/Back	32RBBPR300
32	425	Back/Back	32RBBPR425

(available in AS, PB, SSS, PSS)


'L' shaped handle

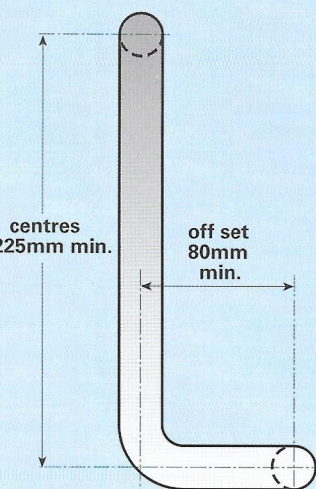


Traditional cranked

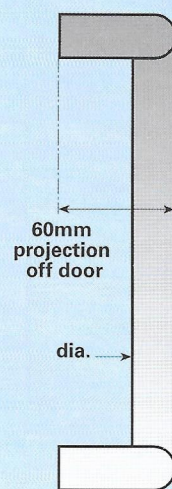


Circular entrance handle

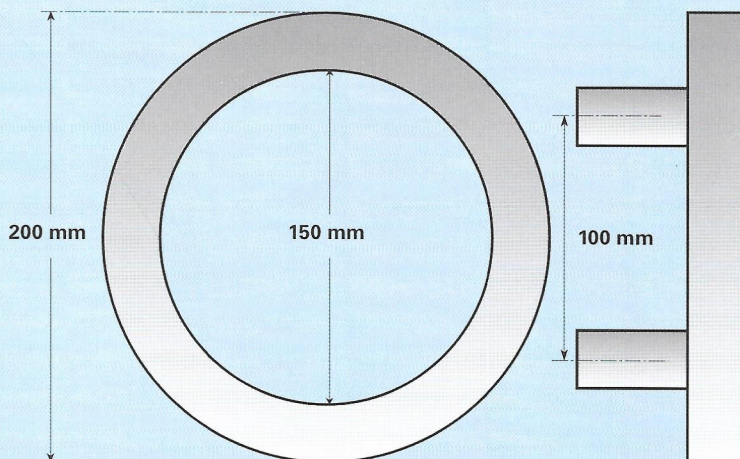


300 - 2100 mm

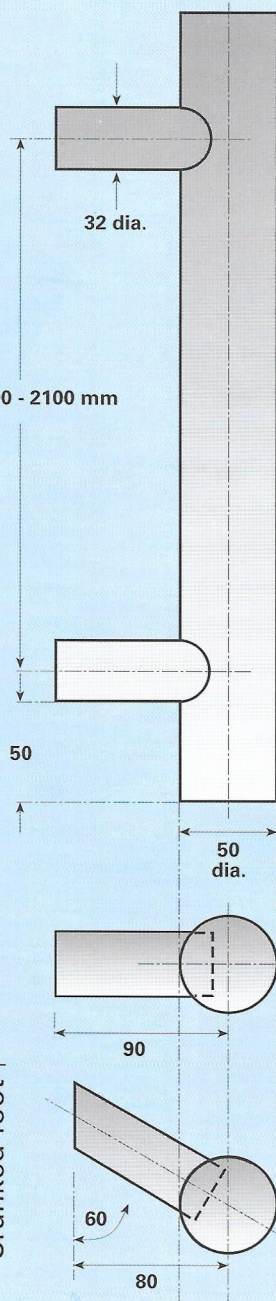

Cranked foot

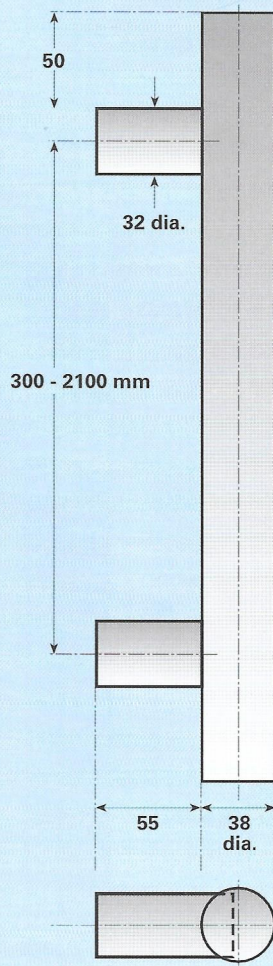

Push pads

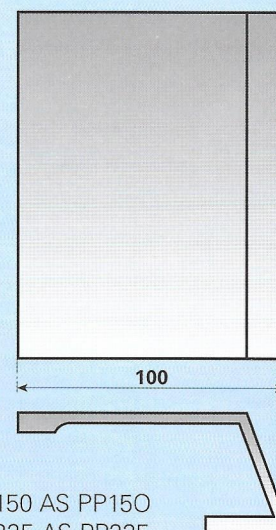

100 x 150 AS PP150
100 x 225 AS PP225
100 x 300 AS PP300

Diameters of feet

Pull handle diameter = feet diameter
25mm = 22mm
32mm = 25mm
38mm = 32mm
50mm = 32mm